


2 7/8"  
(73 mm)

2 3/8"  
(60 mm)



# RECTANGULAR SIGHTGLASSES

## Series RS-OB

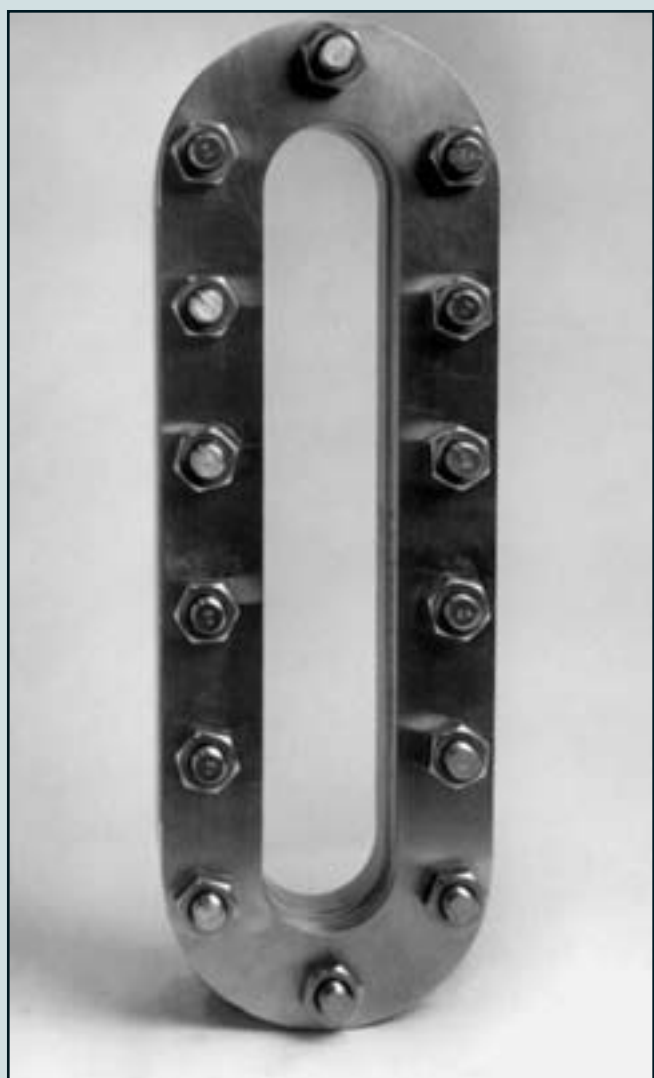

### SERIES RS-OB

Series RS-OB rectangular obround sightglasses are manufactured from ASME Section VIII acceptable metals. The lower flange can be supplied thicker if required to reinforce the vessel opening or curved to match the vessel's geometry. Standard lengths are listed with special sizes quoted upon request. The Series RS-OB is recommended for pressures up to 150 PSIG (14.3 Barg) and temperatures to 500°F (260°C). Higher temperatures and pressures available.

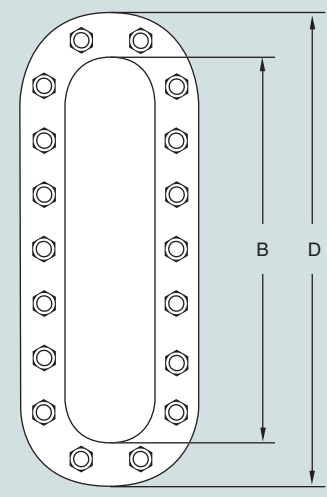

Size*	A		B		C		D		E		F		APPROX. WEIGHT	
	Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM	Inches	MM	LBS	KGS
RS-OB 2x12	2	51	12	305	5	127	15	381	1 1/4	32	3/4	19	36	16
RS-OB 2x18	2	51	18	457	5	127	21	533	1 1/4	32	3/4	19	47	21
RS-OB 3x12	3	76	12	305	6	152	16	406	1 1/4	32	7/8	22	47	21
RS-OB 3x18	3	76	18	457	6	152	22	559	1 1/4	32	7/8	22	58	26
RS-OB 4x12	4	102	12	305	7	178	17	432	1 1/4	32	1	25	58	26
RS-OB 4x18	4	102	18	457	7	178	23	584	1 1/4	32	1	25	70	32

\*Other sizes available

SIGHTGLASSES